
G. GIOANOLA

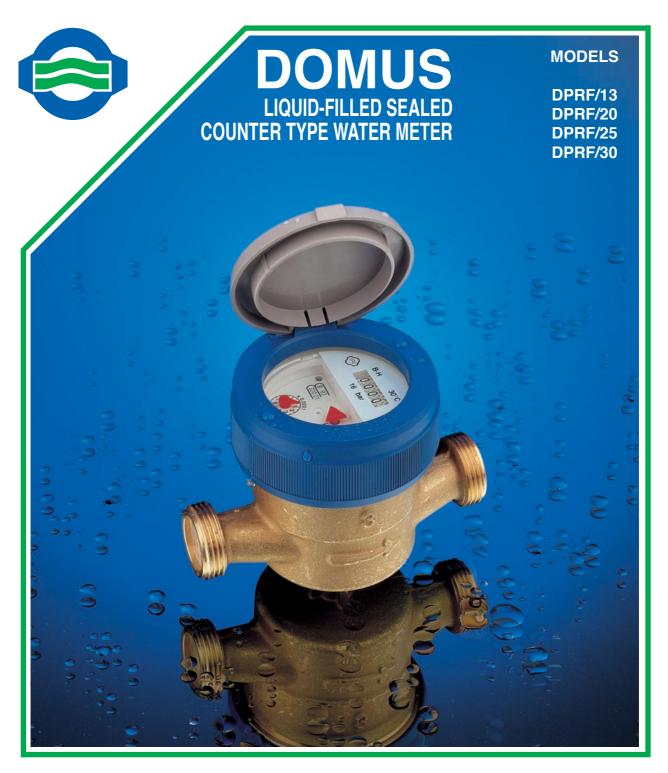

- * Single-jet turbine water meter
- * DPRF model for cold water up to 30 °C
- * Direct-read roller indicator
- * The numbered drums are contained in a sealed capsule filled with a special liquid
- * An anti-fogging system ensures a clear reading in all conditions
- * The DPRF meter can be used with any kind of water even if particularly hard, scaling, turbid or muddy as the counter will remain protected even in water that contains high level of dirt or other contaminants such as iron
- * Indelible wet dial
- * Hydraulic features in line with EEC metrological standards following provision n°. 75/33

DOMUS LIQUID-FILLED SEALED COUNTER TYPE WATER METER

Nominal size of the meter			13	20	25	30	
Qmax	Maximum flow rate	m³/h	3	5	7	10	
Qn	Nominal continuous flow rate	m³/h	1,5	2,5	3,5	5	
Qt	Transitional flow rate with ± 2% error	l/h	120	200	280	400	
Qmin	Minimum flow rate with ± 5% error	l/h	30	50	70	100	
Qt	Transitional flow rate with ± 2% error in class	c ^{I/h}	22,5	37,5	52,5	75	
Qmin	Minimum flow rate with ± 5% error in class C	l/h	15	25	35	50	
	Starting flow	l/h	5	8	13	13	
	Dial registers from/to	m³	0,0001/ 100.000	0,0001/ 100.000	0,0001/ 100.000	0,0001/ 100.000	
	Working pressure	bar	16	16	16	16	
	Test pressure	bar	25	25	25	25	
	Lenght 'A' without pipe fittings	mm	110	130	160	160	
	Lenght 'B' with pipe fittings	mm	190	228	260	280	
	Maximum diameter 'C'	mm	75	75	100	100	
	Height 'D' with open lid	mm	151	151	185	185	
	Height "E' with closed lid	mm	84	84	103	103	
	Height of tube 'F'	mm	24	24	34	34	
	Weight including pipe fittings	kg	0,890	1,150	1,870	2,120	
	Weight without pipe fittings	kg	0,730	0,900	1,400	1,450	

MODELS:

FOR COLD WATER UP TO 30 °C

DPRF/13 1/2"


DPRF/20 3/4"

DPRF/25 1"

DPRF/30 1.1/4"

The Complete DPRF range is EEC homologated according to metrological classes B and C of EEC standards

The Company's policy is one of continuous product improvement and the right is reserved to modify the specifications contained herein without notice






Strada Alessandria 50
Tel. +(39)-0141-793536 - Fax +(39)-0141-702757
14049 NIZZA MONFERRATO (AT) - ITALY

E-mail: info@gioanola.it http://www.gioanola.it

TYPICAL ACCURACY CURVE

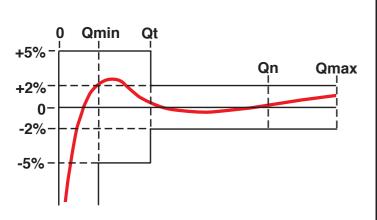

HEAD LOSS DIAGRAM

