

Residia-Jet-C Qn 1,5

Single jet water meter with composite housing and modular register with option: "base r" radio module



Main characteristics


Housing made of high grade composite material

Modular register

Option: "base r" radio module
Single jet completely dry meter
Protection against external magnetic fields
Benefits of the composite housing



Permissible Installation position

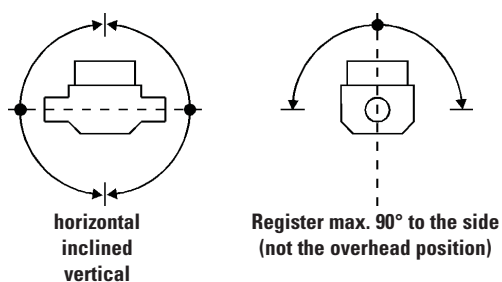

Metrological Class B is achieved with horizontal installation, register upwards

Performance Data

Rated flow rate	Q _n	m ³ /h	1,5
Maximum flow rate	Q _{max}	m ³ /h	3,0
Transitional flow rate	Q _t	l/h	120
Minimum flow rate:			
horizontal installation; register upwards	Q _{min}	l/h	30
vertical installation or register inclined	Q _{min}	l/h	60
Maximum Working pressure	P _N	bar	10
Test pressure	P	bar	16
Pressure loss at Q _{max}		bar	1
Flow rate at 1 bar pressure loss		m ³ /h	3
Maximum water temperature:			
Cold water version		°C	30
Hot water version		°C	90
Display range		m ³	100000
Minimum reading (can only be read off if no module is fitted on)		l	0,1


Technical Data for the optional communication module

Base r radio module

Working voltage	DC 3 V (Lithium battery)
Battery life	12 + 1 years
Radio frequency	868,3 MHz
Transmission power	< 5 mW
Transmission frequency	6 times / 24 h
Ambient temperature	
For transport and storage	- 25 ... + 60°C
In operation	0 ... 55°C
Enclosure class	IP 65

Other communication modules on request


Dimensional picture

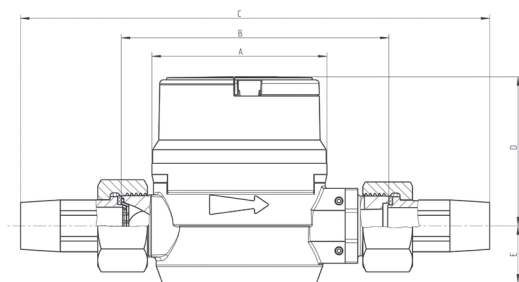

Materials

Housing:	Composite
Impeller:	Plastic
Impeller shaft:	Bronze
Annular magnets:	Ceramic permanent magnets
Sealing plate:	Plastic
Gears and drives:	Plastic
Cowl:	Plastic
Bearing jewels:	Sapphire

Typical measurement error curve

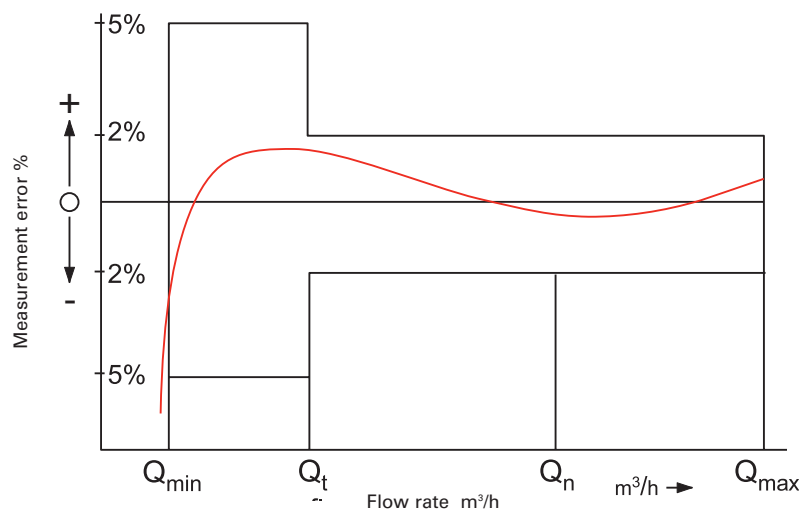


Dimensions and weights

Installed length	mm	110*
Meter fitting thread	inches	G 3/4
Pipe connection thread	inches	R 1/2
Dimension	a mm	70,5
	b mm	110*
	c mm	189
	d mm	60
	e mm	23
Weight	kg	0,27

* variable $\pm 2,5$ mm

Typical pressure loss curve

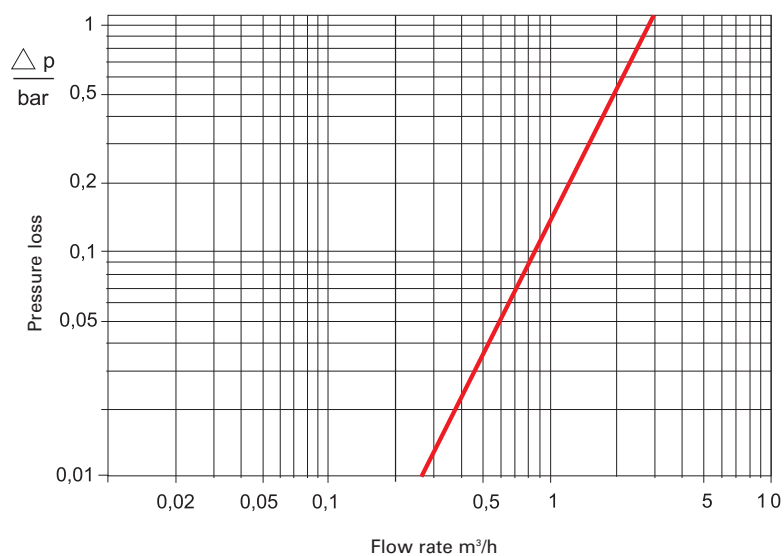

Ordering instructions

The meter is defined by a variant configurator. The Order Ref. No. (Order Ref. Code) is formed by inserting the particular feature codes at the relevant place.

The following table names all selectable features and their codes.

Boxes 5, 10 and 11 must be filled in.

The standard variants with Order Ref. No. are listed following the summary below.

Feature	Feature value	Code	Boxes / positions in the Order Ref. No										
			1	2	3	4	5	6	7	8	9	10	11
	Coding / Order Ref. No.>		R	S	B	E		B	C	E	U		
Meter type	Single jet meter	RS											
Nominal size	Qn 1,5	B											
Approval	EU	E											
Medium-Temperature	Cold water 30°C	K											
	Hot water 90°C	W											
Installed length / Connection	110 mm R 1/2" (G 3/4")	B											
Housing	Composite	C											
Logo/Labelling	Europe Standard	EU											
Metrol. Class/Calibration	EAH	1											
	EBH	2											
Communication module	No module	X											
	Radio module Base-R	R											

Example:
 Single jet meter; Qn 1.5; Europe version; for cold water
 Installed length 110 mm R 1/2"; composite housing;
 Europe-Labeling; Class B; no module

Order Ref. No.

R	S	B	E	K	B	C	E	U	2	X
---	---	---	---	---	---	---	---	---	---	---

Order Ref. Numbers for standard variants

Model designation	Temperature stage	Installed length / Connection	Order Ref. No.
Residia-JET-C Qn 1,5	30° C	110 mm R 1/2" (G 3/4")	88125321
Residia-JET-C Qn 1,5	90° C	110 mm R 1/2" (G 3/4")	88125331